


Asphalt Overlay

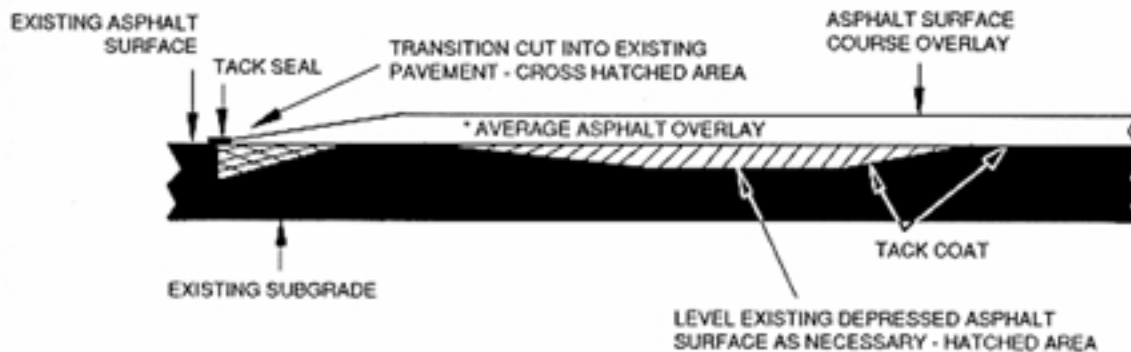

1. Layout and mark area of overlay.
 2. Where asphalt overlay adjoins existing surfaces provide for a transition.
 3. Clean overlay area of vegetation, dirt and surface debris as required. Dispose of all debris offsite.
 4. Mechanically apply liquid asphalt tack coat to complete area of overlay.
 5. Install asphalt leveling course material when needed to level any severely depressed areas.
 6. Install 2" average depth of hot mix asphalt surface course material
 7. Roll surface course to achieve a true and firm finish.
 8. Apply a seal of liquid asphalt, when necessary, to the adjoining edges of the overlay to help prevent moisture penetration.
- NOTE:** Asphalt General is not responsible for ponding water or poor drainage in areas where grade is less than 2%.